


<u>NOTES:</u>

- 1) SEALANT IS A MAINTENANCE ITEM AND IS NOT COVERED UNDER THE SIKA WARRANTY.
- 2) PIPE SEAL MUST HAVE INTACT RIB AT TOP EDGE, REGARDLESS OF PIPE DIAMETER.

TA SHEETS, AND MATERIAL SAFETY DATA SHEETS, ALL SALE OF SIKA PRODUCTS AND SERVICES ARE SUBJECT TO SIKA'S TERMS AND CON

- 3) DECK FLANGES OF THE PRE-MOLDED PIPE SEAL SHALL NOT BE OVERLAPPED, CUT, OR APPLIED OVER ANY ANGLE CHANGE.
- 4) THE EMPTY SPACE MUST BE FILLED WITH AN EXPANDING URETHANE FOAM OR OTHER SIKA APPROVED INSULATION. THIS WILL MINIMIZE CONDENSATION FORMATION AS WELL AS PROVIDING SOME RESILIENCY TO THE FINISHED DETAIL.

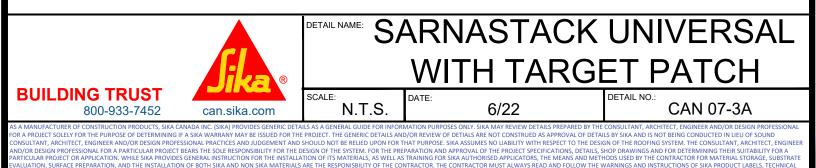

DITIONS OF SALE AVAILABLE AT

CAN SIVA