FASTENER, PLATE & BAR SELECTION GUIDE







Fasteners	Deck Type ^{1,2,3}	Lengths Available
Sarnafastener #14	Structural Concrete, Wood Plank (min 1-1/2"), Plywood (min 5/8")	1 - 1/4" to 14"
Sarnafastener #15 XP	Steel (18 ga - 24 Ga), Wood Plank (min 1-1/2"), Plywood (min 5/8")	11/4" - 20"
Retrodriller	Purlin Steel 12 Ga - 16 Ga	4" - 10"
Bar, Plates & Discs	Use	Systems
Sarnaplate	Board Attachment	All (except Rhinobond)
Sarnaplate Low Profile⁵	Board Attachment	Adhered Décor
Sarnadisc Rhinobond	Board/Membrane Attachement	Rhinobond (Metal Retrofit)
Sarnadisc Rhinobond Treadsafe	Board/Membrane Attachement	Rhinobond (Metal Retrofit)
Sikaplan Disc (Eyehook)	Membrane Attachment	Sarnafast/Inseam
	Transition Securement	Sarnafast/Inseam, Rhinobond (Metal Retrofit)
Sarnabar	Membrane Attachment	Engineered
	Transition Securement	All
Sarnastop⁴	Transition Securement	All (except Sarnafast/ Inseam)

Notes

- 1 Fastener is to penetrate the steel, concrete, wood plank deck a minimum 1" $\,$
- 2 Fastener is to penetrate the undeside of the plywood deck by 1/2"
- 3 Pilot holes are required on structural concretre decks
- 4 Not to be used on FM projects

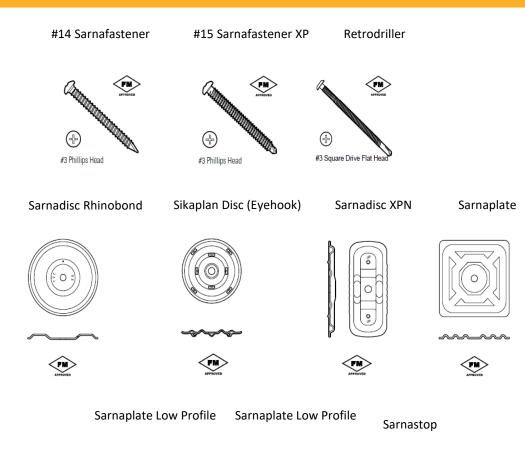



0

For up to date and accurate information, please consult the current Product Data Sheet for all Sika products at www.sika.ca

SIKA CANADA INC.