

FACT SHEET Sika® Control NS SHRINKAGE REDUCING AND COMPENSATING ADMIXTURE

- Reduced Cracking Due to Drying and Autogenous Shrinkage
- Controled Expansion Mechanism for Producing a Volume Stable Concrete
- Increased Joint Spacing
- Reduced Curling Risks
- Improved Concrete Durability, Impermeability and Surface Quality



FACT SHEET Sika® Control NS

SHRINKAGE REDUCING AND COMPENSATING ADMIXTURE


PRODUCT HIGHLIGHTS:

- Dual mechanism providing controlled expansion and surface tension reduction to prevent drying and autogenous shrinkage cracking
- Allows increased joint spacing, reduces construction time and initial joint costs
- Qualifies as a "shrinkage compensating admixture" per ACI 212.3R-16, Chapter 12, "Report on Chemical Admixtures for Concrete"
- NSF-61 certified (dissolvable bags only) for potable water applications
- Negligible effect on fresh and hardened properties of concrete
- Available in 11.34 kg (25 lb) dissolvable bags and 907 kg (2000 lb) FIBC

TYPICAL APPLICATIONS

- Slabs-on-grade (industrial, commercial, residential)
- Elevated decks and slabs
- Bridge decks and parking structures
- Water/Waste water treatment structures
- Airport runways and pavements
- Dams and marine structures
- Topping slabs
- Architectural concrete
- Any concrete to prevent shrinkage cracking



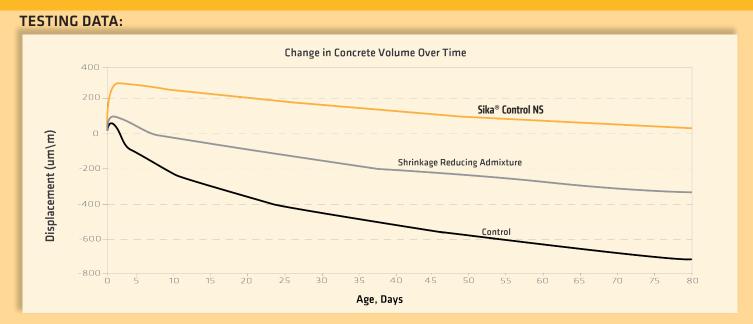

FOR MORE INFORMATION ABOUT Sika® Control NS:

Contact Sika Team at 800 933 7452 ■ Website: can.sika.com
For up to date and accurate information please consult the current Product Data Sheet at www.sika.ca

